REAR VIEW ON FITTING

(SCALE 1:2 (A4))

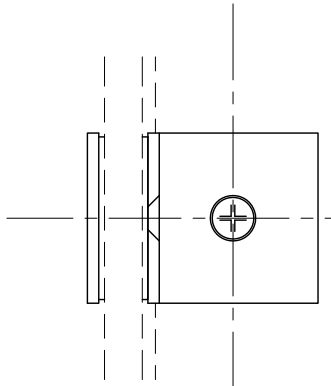

REQUIRED GLASS PREP 'A'

(SCALE 1:2 (A4))

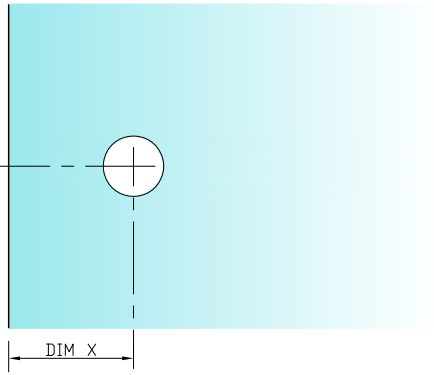

(Ø16mm HOLE)

DIM X = 24mm + DIM (t) (GLASS THICKNESS)

PLAN VIEW ON FITTING

(SCALE 1:2 (A4))

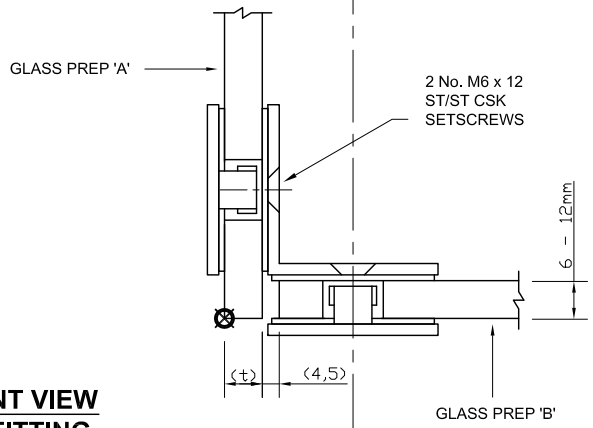

(GLASS REDUCTION/ADDITION REQ.
FROM OUTSIDE GLASS CORNER
DATUM HIGHLIGHTED):-

+ 0mm	(PREP 'A' GLASS)
- (DIM (t) + 4.5mm)	(PREP 'B' GLASS)

FRONT VIEW ON FITTING

(SCALE 1:2 (A4))



REQUIRED GLASS PREP 'B'

(SCALE 1:2 (A4))

HOLE PREP CAN BE SLOTTED (5mm) TO GLASS EDGE TO SUIT FABRICATORS LIMITATIONS

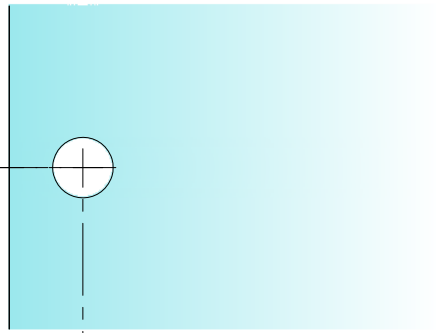

(Ø16mm HOLE)

The Vision Group,
6 Barnes Close,
Brandon, Suffolk
IP27 0NY

TEL: **+44 (0)1842 816086**
FAX: +44 (0)1842 815515
WEB: **www.spiralhardware.co.uk**
E-MAIL: info@spiralhardware.co.uk

Copyright (c) - April 2008, All Rights Reserved

NOTES/SPECIFICATION:

ALL FITTING COMPONENTS IN SATIN STAINLESS STEEL.

PRODUCT SUITABLE FOR 6 TO 12mm TOUGHENED GLASS PANES.

FITTING SUPPLIED COMPLETE WITH:-

1) 4 No. x 1.25mm TRANSLUCENT RUBBER GLAZING WASHERS.

2) 2 No. M6 x 12mm ST/ST POSI-DRIVE HEAD CSK SETSCREWS

(NOTE CUSTOMER TO PROVIDE ALTERNATIVE FIXINGS WHERE REQUIRED)

PRODUCT REF:	**SH/PAS/B02**
DESCRIPTION:	DIMENSIONED ELEVATIONS AND REQUIRED GLASS PREP DETAIL * *
DRAWING REF:	**SH/PAS/B02 - 001A**